




NEW SLIM DESIGN

Ergonomically designed slim shape with one hand operated knob and buttons. Just fit the palm of your hand and your needs.

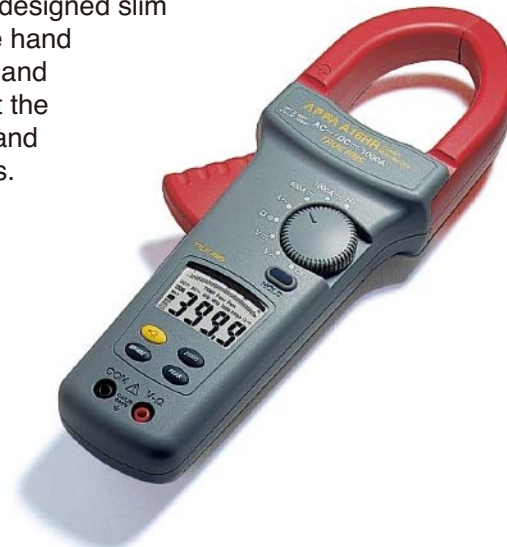

DAY & NIGHT

APPA A10 series clamp multimeters all have a LED backlit display that turns ON/OFF at the touch of a button, also automatically goes off to extend battery life.



EXTRA TEMPERATURE FEATURE

Special designed temperature test facility for daily industrial temperature measurement application. (A10N & A18plus only)



ADVANCED POWER FEATURES MADE EASY

APPA A18plus provides advanced Power features and Total Harmonic Distortion along with easy-to-use interface, which enables fully power measurement application with excellent performance.



FULL SIZE JAW

True 1000A conductor size up to 51mm diameter (2000MCM) with excellent residual magnetism (A16H/A16HR).



APPA A11 APPA A11R (True-RMS reading)

4000 count digital display
Backlit, Large scale display
Analog Bar graph
True RMS reading on AC mode (A11R)
AC 600 Amps capability
AC 600 Volts capability
DC 600 Volts capability
400 Ohms Resistance capability
Continuity Beeper
Display Hold
Peak Hold (10ms)
Min Max Function
Frequency Counter
Auto Power Off
Up to 34mm dia. (750MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT.III 600V Safety Standard



APPA A12 APPA A12R (True-RMS reading)

4000 count digital display
Backlit, Large scale display
Analog Bar graph
True RMS reading on AC mode (A12R)
AC 600 Amps capability
DC 600 Amps capability
AC 600 Volts capability
DC 600 Volts capability
400 Ohms Resistance capability
Continuity Beeper
Display Hold
Peak Hold (10ms)
DCA Zeroing Key
Min Max Function
Frequency Counter
Auto Power Off
Up to 35mm dia. (750MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT.III 600V/CAT.II 1000V Safety Standard



APPA A10N

4000 Count digital display
Backlit, Large scale display
AC 600 Amps capability
DC 4000µAmps capability
AC 750 Volts capability
DC 1000 Volts capability
40M Ohms Resistance capability
Continuity Beeper
Diode Test
Display Hold
Capacitance Measurement Up to 4mF
°C / °F Temperature Test
Auto Power Off
Up to 32mm dia. (750MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT. III 600V/CAT.II 1000V Safety Standard



APPA A15 APPA A15R (True-RMS reading)

4000 Count digital display
Backlit, Large scale display
Analog Bar graph
True RMS reading on AC mode (A15R)
AC 1000 Amps capability
AC 750 Volts capability
DC 1000 Volts capability
400 Ohms Resistance capability
Continuity Beeper
Display Hold
Peak Hold (10ms)
Min Max Function
Frequency Counter
Auto Power Off
Up to 51mm dia. (2000MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT.IV600V/ CAT.III 1000V Safety Standard



APPA A16 APPA A16R (True-RMS Reading) APPA A16H APPA A16HR (True-RMS Reading)

4000 Count digital display
Backlit, Large scale display
Analog Bargraph
True RMS reading on AC mode (A16R, A16HR)
Silicon-Steel alloy jaw mechanism (A16, A16R)
Nickel-Steel alloy jaw mechanism (A16H, A16HR)
Excellent Residual Magnetism Performance (A16H, A16HR)
AC 1000 Amps capability
DC 1000 Amps capability
AC 750 Volts capability
DC 1000 Volts capability
400 Ohms Resistance capability
Continuity Beeper
Display Hold
Peak Hold (10ms)
DCA Zeroing Key
Min Max Function
Frequency Counter
Auto Power Off
Up to 51mm dia. (2000MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT.IV600V/ CAT.III 1000V Safety Standard



APPA A18plus (True-RMS reading)

6000 Count digital display
Backlit, Large scale display
Power and Power Factor measurement
Total Harmonic Distortion measurement
Phase Rotation indication
AC+ DC True RMS reading
Auto AC/DC detection
AC/DC 600A capability
AC1000V, DC1000V capability
Power 600K Watt capability
20KΩ Ohms Resistance capability
Continuity Beeper
Display Hold
Peak Hold
Inrush current measurement
DCA Auto-Zeroing Key
Min Max Function
Frequency Counter
Temperature measurement
Auto Power Off
Up to 35mm dia. (750MCM) Conductor
4 feet Drop Proof
Deluxe Carrying Case
Hand Guard & Stream Line Designed
Convenient Battery Door
CAT. III 600V/CAT.II 1000V Safety Standard



BATTERY EASY TO REPLACE

Unscrew only one screw to remove battery door for battery replacement, designed for user's convenience without opening the bottom case.